



# KLIMAX KONTROL PREAMPLIFIER

## SPECIFICATION

The ultimate reference quality stereo preamplifier


### KEY FEATURES INCLUDE

- Linn's flagship preamplifier, combining technological and aesthetic excellence with pitch accurate sound quality
- Cool running, sleek case machined from solid aluminium that isolates and screens the circuitry
- Short, simple audio signal path designed to optimise the purity and accuracy of reproduction
- Three line level inputs, one balanced input
- Compatible with Linn Knekt multiroom system

The Linn KLIMAX Kontrol preamplifier is a high performance audio component designed to complement KLIMAX power amplification both sonically and aesthetically.

The machined-from-solid clamshell construction of the KLIMAX casework is a beautiful and unique design that screens, protects and stabilises the internal electronics.


Inside there are four circuit boards, one an auto ranging slimline power supply providing silent power to the unique audio circuit board. The display and control boards are separated from the audio board to keep the audio signal path as clean as possible. This complete product gives unsurpassed performance from a compact audio component.

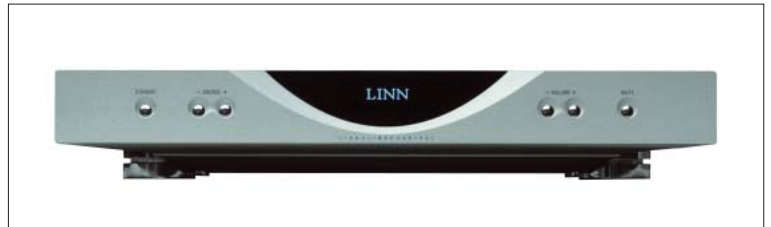

1



2

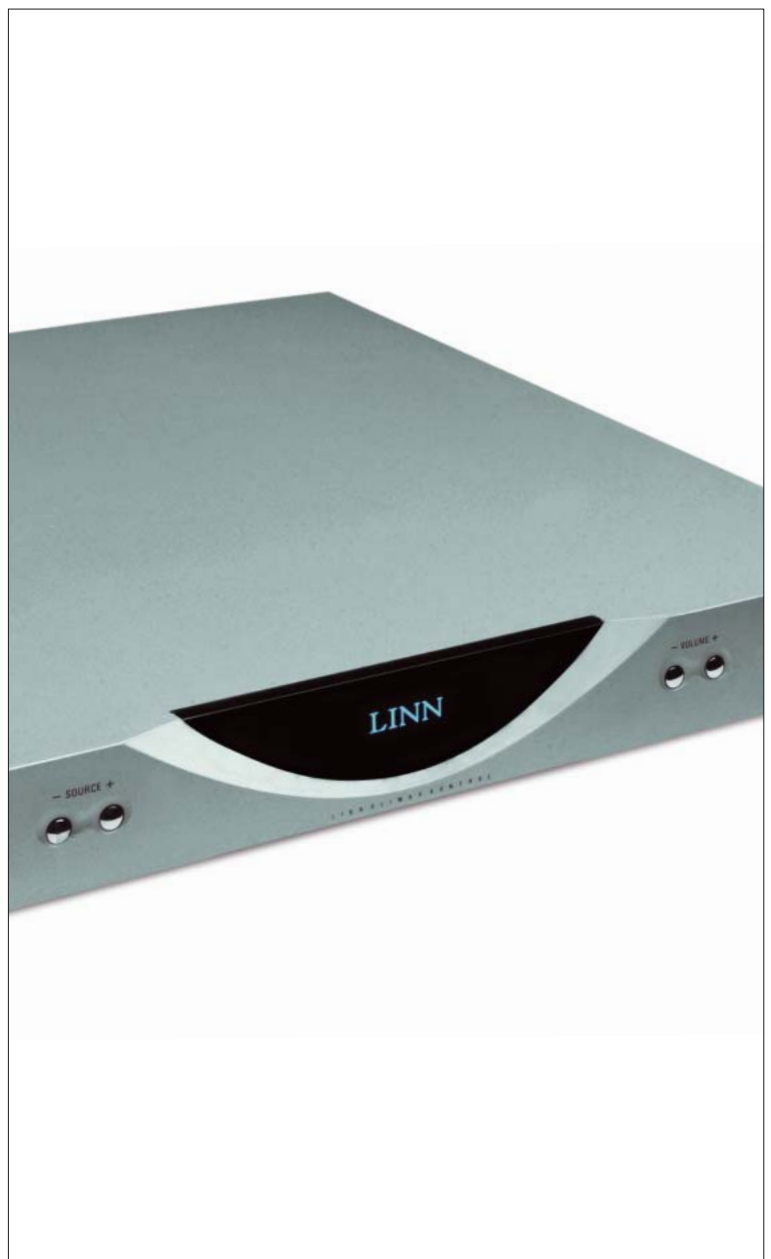

3

# KLIMAX KONTROL PREAMPLIFIER

## TECHNICAL SPECIFICATION

The ultimate reference quality stereo preamplifier

■	Introduced	2002
■	Type	Reference quality preamplifier
■	Input connectors	Unbalanced: 3 sets WBT Phono sockets Balanced: 1 set Female XLR Pin connections: Phono-inner hot, outer hot XLR- Pin 1: OV, Pin 2: Hot, Pin 3: Cold
■	Output connectors	Balanced: 1 set XLR Unbalanced: 1 set WBT Phono sockets
■	Fuse rating	T800mA anti-surge
■	Mains supply range	100V - 240Vac nominal
■	Audio inputs	Impedance (unbalanced) 10k $\Omega$ Signal (unbalanced) 0dBV (nominal) Impedance (balanced) 7.8k $\Omega$
■	Audio outputs	Impedance (unbalanced) 300 $\Omega$ Impedance (balanced) 600 $\Omega$
■	Gain range	Minimum to maximum -95.5dB to +9.5dB in 0.5dB steps
■	Frequency response	2.3Hz - 200kHz
■	Distortion (harmonic)	0.0025% (1kHz @ 0dBV)
■	Dynamic range	115dB
■	Cross talk	Channel to channel -116dBv Source to source -116dBv
■	Standby power	15W
■	Dimensions	W 350 x D 355 x H 60 mm W 13.8 inches x D 13.9 inches x H 2.3 inches
■	Weight	9kg/19.84lbs

The above information is subject to change without prior notice

### Linn Products Ltd

Floors Road, Waterfoot, Glasgow G76 0EP, Scotland, UK.

Telephone: +44 (0) 141 307 7777, Facsimile: +44 (0) 141 644 4262, Helpline: 0500 888909, E-mail: [helpline@linn.co.uk](mailto:helpline@linn.co.uk), Website: [www.linn.co.uk](http://www.linn.co.uk)

### Linn Products Inc

8787 Perimeter Park Boulevard, Jacksonville FL 32216, USA.

Telephone: +1 (904) 645 5242, Facsimile: +1 (904) 645 7275, Helpline: 888-671-LINN, E-mail: [helpline@linninc.com](mailto:helpline@linninc.com), Website: [www.linninc.com](http://www.linninc.com)

### Linn Deutschland GmbH

Albert-Einstein-Ring 19, 22761 Hamburg, Deutschland.

Telephone: +49-40-890 660-0, Facsimile: +49-40-890 660-29, E-mail: [info@linngmbh.de](mailto:info@linngmbh.de), Website: [www.linn.co.uk](http://www.linn.co.uk)

### Linn Records Ltd

257 Drakemire Drive, Castlemilk, Glasgow G45 9SZ, Scotland, UK.

Telephone: +44 (0) 141 303 5027, Facsimile: +44 (0) 141 634 0733, Helpline/Mail order: +44 (0) 141 303 5029, E-mail: [records@linn.co.uk](mailto:records@linn.co.uk),

Website: [www.linnrecords.com](http://www.linnrecords.com)

### Pack 659 (08/2002)

KLIMAX is a trade mark of Linn Products Limited, registered in at least UK and/or European Union.