

LINN

Linn UNIDISK™ - RS232 ASCII Interface Specification and Commands

Revision 2.05

Revision History

<i>Revision</i>	<i>Description</i>	<i>Author</i>	<i>Date</i>
1.0	Initial Document	Andrew Gebbie	05 th September 2002
1.1	Addition Of New Information And Reformatting	Barry W Christie	31 st October 2002
1.2	Update of document to reflect additions/changes	Barry W Christie	05 th December 2002
1.3	Update of document to reflect additions/changes	Barry W Christie	12 th December 2002
1.4	Update of document to reflect additions/changes	Barry W Christie	13 th February 2003
1.5	Corrections	Barry W Christie	31 st March 2003
1.6	Update of document to reflect additions/changes	Barry W Christie	30 th April 2003
1.7	First Release	Barry W Christie	07 th May 2003
1.8	Added LAYER commands. Change to PLAY command acceptance condition. INIT command now implemented. Startup message corrected from UNIDISC to UNIDISK.	S.A.Garside	15 th July 2003
1.9	Added NAMEINFO command. Extended KEY command.	Barry W Christie	01 st August 2003
2.0	Additional commands for Unidisk 3 added. Modifications and additions to user options.	Barry W Christie	15 th October 2003
2.01	Change to SPEAKER SIZE / TRIM command	Barry W Christie	17 th October 2003
2.02	Update to audio commands. Changed Tv type parameter MULTI to NATIVE.	Barry W Christie	27 th October 2003
2.03	Corrected some typing errors. User option 'PREAMPLIFIER_CONTROL' removed. User option 'HIRES_SACD_DVDA_AUDIO', changed 'PROCESSED' to 'NORMAL'. 'Relationship Between Disc Commands And Product State' table updated (part of 'Appendice D').	Barry W Christie	04 th February 2004
2.04	Corrections. User options split into separate sections for Unidisk 1.1 / 2.1 and Unidisk SC	Barry W Christie	05 th April 2004
2.05	Additional commands added ... STANDBY, DISCID, DISCTOC, ASPECTRATIO, NTSCTYPE, CHANNELSETUP, SPDIFOUTPUT, PRIMARYDISPLAYDEVICE, CLOSEDCAPTIONS, DOWNMIX, LPCMOUTPUT, DUALMONO, MIDNIGHTMOVIE	Barry W Christie	09 th September 2004

Table of Contents

INTRODUCTION	1
1: MESSAGE PROTOCOL	2
1.1: Overview	2
1.2: Message Syntax	2
1.3: Identifier Considerations	3
1.4: Syntax of Commands and Responses	4
1.4.1: Command Syntax	4
1.4.1.1: Command Help	4
1.4.1.2: Command	4
1.4.2: Solicited Response Overview	5
1.4.2.1: Initial Response	5
1.4.2.1.1: Initial Response Failure	5
1.4.2.2: Final Response	5
1.4.2.2.1: Final Response Failure	5
1.4.3: Unsolicited Response Overview	6
1.4.3.1: Unsolicited Response	6
2: SYSTEM COMMANDS	7
2.1: Identity Commands	7
2.1.1: ID	7
2.1.2: GID	7
2.2: Communication Commands	8
2.2.1: BAUD	8
2.2.2: RESET	8
2.2.3: ECHO	8
2.2.3.1: Power_Up Message	8
2.3: Polling Command	9
2.3.1: POLL	9
2.3.2: Polling Explained	10
2.4: Status Command	11
2.4.1: STATUS	11
2.4.1.1: Status Codes	11
2.5: IR	12
2.6: INIT	12
2.7: CHECKSUM	12
2.8: COUNTER	13
2.9: VERSION	13
3: UNIDISK COMMANDS	15

3.1: Command Help	15
3.2: System Commands	15
3.3: Other Commands	16
3.3.1: DISC COMMANDS	16
3.3.1.1: OPEN	16
3.3.1.2: CLOSE	16
3.3.1.3: PLAY	16
3.3.1.4: PAUSE	16
3.3.1.5: STOP	16
3.3.1.6: MODE	17
3.3.1.7: TRACK	18
3.3.1.8: CHAPTER	19
3.3.1.9: DISCINFO	20
3.3.1.10: NAMEINFO	20
3.3.1.11: SEARCH	21
3.3.1.12: TIME	22
3.3.1.13: PROGRAM (Unidisk 1.1/2.1)	23
3.3.1.14: PROGRAM (Unidisk SC)	24
3.3.1.15: REPEAT	25
3.3.1.16: SKIP	26
3.3.1.17: ZOOM	26
3.3.1.18: KEY	26
3.3.1.19: ANGLE	27
3.3.1.20: MENU	27
3.3.1.21: LAYER	27
3.3.1.22: DISCID	28
3.3.1.23: DISCTOC	28
3.3.2: AUDIO COMMANDS	29
3.3.2.1: STANDBY	29
3.3.2.2: LISTEN	29
3.3.2.3: MUTE	30
3.3.2.4: VOL / VOLUME	31
3.3.2.5: BAL / BALANCE	31
3.3.2.6: SURROUND	32
3.3.2.7: PROLOGICII	32
3.3.3: SETUP COMMANDS	33
3.3.3.1: SETUP	33
3.3.3.2: TV	33
3.3.3.2.1: TYPE	33
3.3.3.3: SPEAKER (Unidisk SC only)	34
3.3.3.3.1: SIZE (Unidisk SC only)	34
3.3.3.3.2: TRIM (Unidisk SC only)	34
3.3.3.4: ASPECTRATIO	35
3.3.3.5: NTSCTYPE	35
3.3.3.6: CHANNELSETUP	35
3.3.3.7: SPDIFOUTPUT	35
3.3.3.8: PRIMARYDISPLAYDEVICE	36
3.3.3.9: CLOSEDCAPTIONS	36
3.3.3.10: DOWNMIX	36
3.3.3.11: LPCMOUTPUT	36
3.3.3.12: DUALMONO	37
3.3.3.13: MIDNIGHTMOVIE	37
3.3.4: OPTION COMMANDS FOR UNIDISK 1.1 / 2.1	38
3.3.4.1: OPTION	38
3.3.4.1.1: DISPLAY	38
3.3.4.1.2: SLEEP_DISPLAY_DELAY	38
3.3.4.1.3: IR_COMMANDS	39

3.3.4.1.4: IR_RC5_OUT	39
3.3.4.1.5: RC5_IN_OUT	39
3.3.4.1.6: RS232_BAUDRATE	39
3.3.4.1.7: RS232_EVENTS	40
3.3.4.1.8: RS232_MESSAGE	40
3.3.4.1.9: CD_COMMANDS	40
3.3.4.1.10: SCROLL_TEXT	40
3.3.5: OPTION COMMANDS FOR UNIDISK SC	41
3.3.5.1: OPTION	41
3.3.5.1.1: DISPLAY_BRIGHTNESS	41
3.3.5.1.2: SLEEP_DISPLAY_DELAY	41
3.3.5.1.3: FRONT_PANEL_IR_COMMANDS	42
3.3.5.1.4: PASS_IR_TO_REMOTE_OUT	42
3.3.5.1.5: PASS_REMOTE_IN_TO_OUT	42
3.3.5.1.6: IR_OUT_MODULATION	43
3.3.5.1.7: ACC_SOCKET_MODE	43
3.3.5.1.8: KNEKT_MODE	43
3.3.5.1.9: KNEKT_AUDIO	43
3.3.5.1.10: KNEKT_LFE	44
3.3.5.1.11: RS232_BAUDRATE	44
3.3.5.1.12: RS232_EVENTS	44
3.3.5.1.13: RS232_STARTUP_MESSAGE	44
3.3.5.1.14: CD_COMMANDS	45
3.3.5.1.15: PLAY_COMMAND	45
3.3.5.1.16: STOP_COMMAND	45
3.3.5.1.17: REPEAT_COMMAND	45
3.3.5.1.18: AUTO_SOURCE_SELECTION_DISC	46
3.3.5.1.19: SOURCE_MEMORY	46
3.3.5.1.20: HIRES_SACD_DVDA_AUDIO	46
3.3.5.1.21: SCROLL_SACD_TEXT	46

APPENDICE A : FORMAT OF COMMAND TABLE 47

APPENDICE B : ESCAPE SEQUENCES 48

APPENDICE C : COMMUNICATIONS SETTINGS 48

APPENDICE D : IGNORED DISC COMMANDS 49

Introduction

This document describes how to control the UNIDISK SILVER DISK ENGINE™ and peripherals through an RS232 interface.

There are three main sections to this document:

1: Message Protocol

- This section describes how commands are constructed and how they may be used.

2: System Commands

- This section lists the commands, which allow the UNIDISK to be used as part of a system driven through an RS232 interface.

3: UNIDISK Commands

- This section defines a list of commands for controlling UNIDISK. This section is further subdivided into the subsets of the UNIDISK commands.
- These are :-
 - Disc Commands
 - Audio Commands
 - Setup Commands
 - Option Commands

1: Message Protocol

1.1: Overview

The RS232 interface on the UNIDISK allows it to be controlled by a touch screen, PC or any computer with an RS232 port. The UNIDISK obeys the commands received through the RS232 interface and replies to confirm successful or unsuccessful operation.

The RS232 interface uses an initial response then final response method to acknowledge receiving the command and then completing the task. The interface also supports device and group identifiers to allow a number of units to be connected together. The controlling device can also supply a source identification, which the UNIDISK will echo as the destination for the replies.

Previous products were termed as slave devices, in regards that nothing was transmitted until something was received, e.g. a task or status command. The UNIDISK however, will transmit unsolicited messages when something within the product changes, e.g. the disc stops playing.

1.2: Message Syntax

The general syntax is as follows: **(Source_ID) (Group_ID) (Destination_ID) Command NL**

Where:

Source_ID Syntax: **#Source_ID#**

is a unique identifier, used to denote the source of the message. Enclosed by the '#' delimiter, the maximum identifier size is 20 ASCII alphanumeric characters (excluding spaces).

Destination_ID Syntax: **@Destination_ID@**

is a unique identifier, used to denote the destination of the message. Enclosed by the '@' delimiter, the maximum identifier size is 20 ASCII alphanumeric characters (excluding spaces).

Group_ID Syntax: **&Group_ID&**

is a unique identifier, used to denote a specific group of products. Enclosed by the '&' delimiter, the maximum identifier size is 20 ASCII alphanumeric characters (excluding spaces).

Command Syntax: **\$Command\$**

is the command from the host for the product. Enclosed by the '\$' delimiter.

NL Syntax: 13dec and 10dec (0Dhex and 0Ahex)

are the line termination characters, carriage return and line feed.

Note:

Nesting of fields is not permissible, nor is the use of the special delimiter characters as part of the field strings themselves, unless they are expressed as an escape sequence (see Appendice B : Escape Sequences).

Spaces are permissible before and after an identifier, but are not allowed within the actual identifier, unless they are expressed as an escape sequence (see Appendice B : Escape Sequences).

For example, # recorddeck # is valid whereas # record deck # is invalid.

By using an escape sequence, the second example becomes valid, i.e. # record\0x20deck #

1.3: Identifier Considerations

The full transmission format uses four fields as shown.

```
#Source_ID# &Group_ID& @Destination_ID@ $Message$
```

Where fields are omitted the results are defined in the following notes.

- \$Message\$ *refer to note 1*
- @Destination_ID@ \$Message\$ *refer to note 2*
- &Group_ID& \$Message\$ *refer to note 3*
- &Group_ID& @Destination_ID@ \$Message\$ *refer to note 4*
- #Source_ID# \$Message\$ *refer to note 5*
- #Source_ID# @Destination_ID@ \$Message\$ *refer to note 6*
- #Source_ID# &Group_ID& \$Message\$ *refer to note 7*
- #Source_ID# &Group_ID& @Destination_ID@ \$Message\$ *refer to note 8*

Note Details

- 1 - A product recognising the command will issue an initial response and try to perform the task.
 - A successful or unsuccessful final response will be issued subsequently.
 - Products not recognising the command will remain silent.
 - If no product recognises the command then there will be no reply.
 - If more than one product recognises the command then there may be a comms clash on the replies.
- 2 - The destination product is responsible for all replies.
 - Invalid commands will generate an error response.
 - The replying product will transfer the destination to the source field on a reply.
 - All products not matching the destination must remain silent and not attempt to handle the command.
 - If two products have the same id, then a comms clash may occur.
- 3 - All products within the group should attempt the task.
 - Products out with the group should ignore the task.
 - There are no replies from any boxes.
- 4 - All products within the group should attempt the task.
 - Products out with the group should ignore the task.
 - Only the product, which matches the destination identity, should reply.
 - Invalid commands will generate an error response.
 - If there are more than two products in the group with the same destination identity then a comms clash may occur.
 - The destination identity becomes the source identity in any reply traffic.
- 5 - As for note 1, with the source identity becoming the destination identity in any replies.
- 6 - As for note 2, with the source identity becoming the destination identity in any replies.
- 7 - As for note 3. There are no replies.
- 8 - As for note 4, with the source identity becoming the destination identity in any replies.

1.4: Syntax of Commands and Responses

1.4.1: Command Syntax

The command message has two variations:

1.4.1.1: Command Help

This allows the host to find out what type of parameters the command requires.

Syntax: **\$? Command\$NL**

Where:

\$	is the command start delimiter
?	is a request for help
Command	is the command help request is for
\$	is the command end delimiter
NL	are the line termination characters - carriage return, line feed.

Additionally, if '**Command**' is a '?' then the command set of the product will be provided, with an initial response followed by a final response for each command supported by the product.

This is a change to the previous method, where the command set of the product was output as a single response, with each command being separated from the next by a space and no help text was included.

Note:

Command help is product dependent and is implemented on the UNIDISK.

1.4.1.2: Command

This is the method by which the host controls the product

Syntax: **\$Command (Param (Param))\$NL**

Where:

\$	is the command start delimiter
Command	is the command string
Param	is the parameter string (0 or more)
\$	is the command end delimiter
NL	are the line termination characters - carriage return, line feed.

Note:

Parameters required are command dependent

1.4.2: Solicited Response Overview

When replies are made an initial response and final response are issued. It is unwise for the host to issue further commands until the final response has been received. Section 1.3: Identifier Considerations, describes the action of identifiers on these replies and specifies rules which may also suppress the replies.

1.4.2.1: Initial Response

This will be given on receipt of a valid command and for a positive acknowledge will be of the form:

```
(Source_ID) (Group_ID) (Destination_ID) !
```

In this way, the host quickly knows that the destination has received and understood the command.

1.4.2.1.1: Initial Response Failure

This will be given on receipt of an invalid command and will be of the form:

```
(Source_ID) (Group_ID) (Destination_ID) !$FAIL sc fn$
```

Where 'sc' is a status code (see section 2.4.1.1: Status Codes) specifying why the task could not be completed, and 'fn' specifies which field was responsible.

Note: There is no final response.

1.4.2.2: Final Response

This will be given on completion of the task and will be of the form:

```
(Source_ID) (Group_ID) (Destination_ID) !$Status_String$
```

The status string will be a unique response to the originating command.

1.4.2.2.1: Final Response Failure

This will be given where a task could not be completed and will be of the form:

```
(Source_ID) (Group_ID) (Destination_ID) !$FAIL sc fn$
```

Where 'sc' is a status code (see section 2.4.1.1: Status Codes) specifying why the task could not be completed, and 'fn' specifies which field was responsible.

Note:

¹ In all cases, identifiers will only be returned as part of the response if supplied as part of the command (refer to section 1.3: Identifier Considerations for further details).

² Fields are numbered from left to right, starting at 1.

1.4.3: Unsolicited Response Overview

Unsolicited responses are an addition to the RS232 protocol, and are generated automatically by the product to inform the host of a change to the products status.

1.4.3.1: Unsolicited Response

This will be given at any time during the operation of the product and will be of the form:

(Source_ID) \$Status_String\$

The major differences between solicited and unsolicited responses are as follows:

1. Unsolicited messages can occur at any time (if activated).
2. Source identifier, if present within product settings, will always form part of the message.
3. No exclamation mark is included before the command delimiter.

Note:

Please refer to user options with regards to unsolicited responses (see 3.3.4.1.7: and 3.3.5.1.12: RS232_EVENTS).




2: System Commands




The following commands allow the UNIDISK to be part of a system driven through an RS232 interface.




2.1: Identity Commands

2.1.1: ID

Configure the product on a one to one basis




 \$ID identifier\$
 \$ID identifier\$
 <i>Write product identifier</i>




 \$ID ~identifier\$
 \$ID\$
 <i>Remove product identifier</i>




 \$ID ?\$
 \$ID identifier\$
 <i>Return product identifier</i>

2.1.2: GID

Configures a product as part of a group so that it can be accessed a number of ways

 \$GID identifier\$
 \$GID identifier\$
 <i>Write group identifier (product now becomes part of a group of products)</i>

 \$GID ~identifier\$
 \$GID identifier [identifier [...]]\$
 <i>Remove a product from a particular group</i>

 \$GID ?\$
 \$GID identifier [identifier [...]]\$
 <i>Return list of currently defined group identifiers from product</i>

Notes on Groups:

A product can be a member of at most 5 groups to allow it to be addressed in a variety of ways.




While in 'group' mode, products with the same group ID will react in the same way to product specific commands sent to them using the Group_ID syntax (&group_id&).




In addition, products in Group Mode will not acknowledge receipt of commands from the host. This is to avoid all products in the group potentially responding at the same time.

Each product can be polled individually at the end of a group mode command to check they have all been updated correctly.

2.2: Communication Commands

2.2.1: BAUD

 \$BAUD baudrate\$
 !\$BAUD baudrate\$
 <i>Select new baud rate from the following: 4800, 9600, 14400³, 19200, 28800³, 38400, 57600³, 115200³, 230400³</i>

 \$BAUD ?\$
 !\$BAUD baudrate\$
 <i>Returns current baud rate (see above)</i>

Note:




¹ Initial and final responses will be at the current baud rate, before the new baud rate is implemented.

² Baud rate defaults to 9600 when the product is initialised.




³ New baud rates supported by this product.

⁴ 2400 baud rate not supported by this product.

2.2.2: RESET

 \$RESET\$
 !\$RESET\$
 <i>Clear communications buffer on product</i>

2.2.3: ECHO

 \$ECHO text\$
 !\$ECHO <text>\$
 <i>Echo's the text back enclosed in < and ></i>

This command is used ease the burden of initial set-up of host-product communications, the product will echo the parameter provided back to the host.

Note:

If no identifiers are supplied with this command, then all devices connected to a system will respond, which may result in a comms clash.

2.2.3.1: Power_Up Message

A power up message is provided which is transmitted to the host in order to verify that the host / product link is working.

The power up message on the UNIDISK is as follows: **!\$UNIDISK\$**




Note:




Please refer to user options with regards to power up message (see 3.3.4.1.8: RS232_MESSAGE and 3.3.5.1.13: RS232_STARTUP_MESSAGE).




2.3: Polling Command




2.3.1: POLL

Polling is used to extract details of all products connected to the host

 \$POLL START\$
 !\$POLL START\$
 <i>Marks the start of polling</i>

 \$POLL ID\$
 !\$POLL ID product identifier\$
 <i>Returns product identifier</i>

 \$POLL SLEEP\$
 !\$POLL SLEEP\$
 <i>Product responding to this will ignore all further commands until 'POLL DONE' is received</i>

 \$POLL DONE\$
 No response to this command
 <i>All products will now return to active operation</i>

Important:


The '**POLL SLEEP**' command should be used with the product identifier returned by '**POLL ID**'.

If this is not done then all the products will stop responding and the polling sequence will fail.

2.3.2: Polling Explained

The RS232 interface hardware, via the **POLL** command, allows communication to daisy-chained RS232 controlled devices. The devices must be capable of buffering data for transmission as required.

Using this feature allows the host to 'auto-detect' the slave products on the RS232 link.

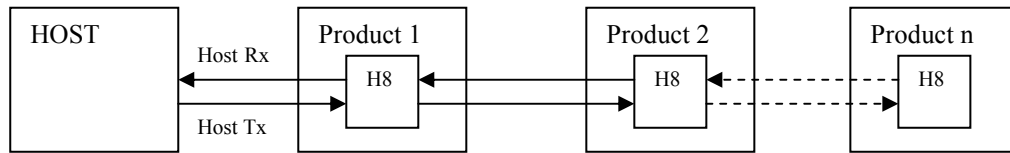

By taking advantage of this, it is possible to identify what is on the link using the following type of algorithm:

\$POLL START\$

- opens return-path switches in all devices, so only first device in chain can respond

\$POLL ID\$

- all devices respond but only response from first device reaches host

@dest_1_id@\$POLL SLEEP\$

- where 'dest_1_id' is the result of the previous 'POLL ID'
- matching product closes its switch
- product will not respond to any command now until 'POLL DONE' command received.

\$POLL ID\$

- second device can now respond with it's ID

@dest_2_id@\$POLL SLEEP\$

- where 'dest_2_id' is the result of the previous 'POLL ID'
- matching product closes its switch
- product will not respond to any command now until 'POLL DONE' command received.

The 'POLL ID' and 'POLL SLEEP' commands are issued repeatedly until all products have been queried and there is no response from the last 'POLL ID' command.

\$POLL ID\$

- no response since all product id's read, so time-out

\$POLL DONE\$

- resync all products on link again

2.4: Status Command

The status command has been provided as a debugging aid, i.e. the host can find out why a command was not processed.

2.4.1: STATUS

 \$STATUS\$
 !\$STATUS sc (sv)\$
 <i>Return the status of the last command</i>





Where 'sc' is the returned status code and 'sv' is the status value (only used with code 25 for now). Codes are allocated on a block basis for each product with the first 48 codes reserved for general use.



2.4.1.1: Status Codes




The following table lists the General Status Codes which all products support.

Code	Description
00 (0x00)	- No error
01 (0x01)	- Unexpected termination of command line
02 (0x02)	- Unrecognised or misplaced character in command line
03 (0x03)	- Corrupted command message (within \$...\$)
04 (0x04)	- Start of another source identifier, identifier has already been supplied
05 (0x05)	- Start of another group identifier, identifier has already been supplied
06 (0x06)	- Start of another destination identifier, identifier has already been supplied
07 (0x07)	- Source identifier is too large, maximum of 20 characters
08 (0x08)	- Group identifier is too large, maximum of 20 characters
09 (0x09)	- Destination identifier is too large, maximum of 20 characters
10 (0x0A)	- Source identifier corrupted
11 (0x0B)	- Group identifier corrupted
12 (0x0C)	- Destination identifier corrupted
13 (0x0D)	- Unknown group identity
14 (0x0E)	- Unknown destination identity
15 (0x0F)	- Unknown command
16 (0x10)	- Unknown command parameter
17 (0x11)	- Parameter missing from ID command
18 (0x12)	- Unknown product identifier, cannot delete
19 (0x13)	- Parameter missing from GID command
20 (0x14)	- Cannot delete group identifier, unknown
21 (0x15)	- Cannot add new group identifier, already exists
22 (0x16)	- Cannot add new group identifier, list full
23 (0x17)	- Polling must be activated by the POLL START command
24 (0x18)	- Only POLL ID , SLEEP or DONE commands accepted during polling
25 (0x19)	- Message exceeded maximum allowable length - 'sv' defines maximum length (upto and including CR, and excluding LF)
26 (0x1A)	- Reserved
up to	
47 (0x3F)	




2.5: IR

 \$IR ?\$
 !\$IR ON\$
 !\$IR OFF\$
 <i>Return current IR control status</i>





 \$IR [Y ON]\$
 !\$IR ON\$
 <i>Enable IR control of product</i>

 \$IR [N OFF]\$
 !\$IR OFF\$
 <i>Disable IR control of product</i>

2.6: INIT



 \$INIT\$
 !\$INIT\$
 <i>Resets product back to factory defaults</i>

2.7: CHECKSUM

 \$CHECKSUM ?\$
 !\$CHECKSUM hhhh\$
 <i>Return current software checksum</i>
 <i>Where: 'hhh' is a four digit hexadecimal value</i>

2.8: COUNTER

 \$COUNTER POWER ?\$
 !\$COUNTER POWER days:hours:minutes:seconds\$
 Returns total powered up (operational) time.

 \$COUNTER MAINS ?\$
 !\$COUNTER MAINS days:hours:minutes:seconds\$
 Returns total mains connected time

2.9: VERSION

 \$VERSION SOFTWARE ?\$
 !\$VERSION SOFTWARE H8 s version ESS s version MECH m version\$
 Return current versions of system software.

Notes:






The format of 's_version' is 'tpppvvvv'

where: 't' is the software release type ('P' = prototype and 'S' = release)
'ppp' is the software identifier (3 digits)
'vvvv' is the software version (4 digits)

The format of 'm_version' is 'dd.dd.dd.dd'

where: 'dd' is a 2 digit field (four fields in total)

VERSION continued ...





 \$VERSION HARDWARE ?\$
 !\$VERSION HARDWARE b_version serial\$
 !\$VERSION HARDWARE UNKNOWN\$
 Return current hardware board version(s).
 Multiple responses may be received if more than one board is present.

Notes:

The format of 'b_version' is 'PCASb_tm_{Rn}'

where	'PCAS'	is the version header
	'b'	is the board identifier (1-16383)
	't'	is the major board release type ('P' = prototype and 'L' = release)
	'm'	is the major board revision number (1-255)
	'R'	is the minor board release type (always 'R')
	'n'	is the minor board revision number (1-255)

and 'serial' is a 16 digit hex value.

 \$VERSION HARDWARE PCAS (b (t (m (Rn (serial))))))\$
 !\$VERSION HARDWARE b_version\$
 !\$VERSION HARDWARE UNKNOWN\$
 Return current hardware board version(s), which match search criteria.

Notes:

This version of the command allows for the interrogation of the hardware, using increasingly specific search criteria, in order to return only the most relevant information.

The search criteria is one of the following (see above for details of format) ...

'PCAS'
'PCASb'
'PCASbt'
'PCASbtm'
'PCASbtmRn'
'PCASbtmRn serial'

The 'b', 'm' and 'n' fields can be specified as '0', which acts as a wildcard character matching any value.

The 't' field can be specified as '?', which acts as a wildcard character matching any value.

Example 1: \$VERSION HARDWARE PCAS270?\$

Will return all boards, which are PCAS270's regardless of whether they are prototype or release versions.

Example 2: \$VERSION HARDWARE PCAS0L1R0\$

Will return all boards, which are release versions but regardless of board type etc.

3: UNIDISK Commands

The following pages contain the command set for the UNIDISK Player.

Important:

¹ Parameters must be separated from commands and each other by at least one space character

² Where a command can be enabled or disabled then

Y or **ON** will enable (turn on) the setting and **N** or **OFF** will disable (turn off) the setting

3.1: Command Help

Command help is implemented by the UNIDISK and will give the host details for any given command.

for example: `$? SEARCH$`

replies with: `!$? SEARCH [?!<|>] speed|STOP]$`

Refer to section 1.4.1.1: Command Help for further information.

3.2: System Commands






The system commands supported by the UNIDISK are **ID**, **GID**, **BAUD**, **RESET**, **ECHO**, **POLL**, **STATUS**, **IR**, **CHECKSUM**, **VERSION**, **COUNTER** and Power_Up Message. These are all explained in section 2: System Commands of this document.

3.3: Other Commands






Where **!\$IGNORED command reason\$** is shown in the command response, please refer to 'IGNORED Disc Commands' for further information.

3.3.1: DISC COMMANDS





3.3.1.1: OPEN

 \$OPEN\$
 !\$OPEN OPENING\$
 !\$OPEN OPENED\$
 !\$IGNORED OPEN reason\$
 <i>Open the drawer</i>





3.3.1.2: CLOSE

 \$CLOSE\$
 !\$CLOSE CLOSING\$
 !\$CLOSE CLOSED\$
 !\$IGNORED CLOSE reason\$
 <i>Close the drawer</i>







3.3.1.3: PLAY

 \$PLAY\$
 !\$PLAY PLAYING\$
 !\$IGNORED PLAY reason\$
 <i>Start playing disc or continue from current position if paused</i>






























3.3.1.4: PAUSE

 \$PAUSE\$
 !\$PAUSE PAUSED\$
 !\$IGNORED PAUSE reason\$
 <i>Pause playing at current position</i>

3.3.1.5: STOP

 \$STOP\$
 !\$STOP STOPPED\$
 !\$STOP PRESTOP\$
 !\$IGNORED STOP reason\$
 <i>Stop playing the disc.</i>
 <i>PRESTOP only applies to DVD and DVD-A discs.</i>

3.3.1.6: MODE





 \$MODE\$
 !\$MODE INSTANDBY\$
 !\$MODE POWEREDUP\$
 !\$MODE SETUPMENU\$
 !\$MODE TRAY_UNDEFINED\$
 !\$MODE OPENING\$
 !\$MODE OPENED\$
 !\$MODE CLOSING\$
 !\$MODE CLOSED\$
 !\$MODE DISC_UNDEFINED\$
 !\$MODE LOADING\$
 !\$MODE NODISC\$
 !\$MODE UNKNOWN\$
 !\$MODE CDDA\$
 !\$MODE SACD\$
 !\$MODE VCD\$
 !\$MODE SVCD\$
 !\$MODE DVD\$
 !\$MODE DVDA\$
 !\$MODE DATA\$
 !\$MODE PLAY_UNDEFINED\$
 !\$MODE PLAYING\$
 !\$MODE PAUSED\$
 !\$MODE PRESTOP\$
 !\$MODE STOPPED\$
 !\$MODE SEARCHING\$
 !\$MODE SCANNING\$
 !\$MODE DVDMENU\$
 <i>Return current operational status</i>





Note:






The status list above is essentially a copy of the 'IGNORED Disc Commands' reason list, with the 'UNIT_', 'TRAY_', 'DISC_' and 'TRAY_' removed (in most cases).





Please refer to 'IGNORED Disc Commands' for further details.





3.3.1.7: TRACK

 \$TRACK +\$
 !\$TRACK number\$
 !\$IGNORED TRACK reason\$
 <i>Select next (available) track.</i>

 \$TRACK -\$
 !\$TRACK number\$
 !\$IGNORED TRACK reason\$
 <i>Select previous (available) track.</i>

 \$TRACK number\$
 !\$TRACK number\$
 !\$TRACK BADTRACK\$
 !\$IGNORED TRACK reason\$
 <i>Select track number</i>





 \$TRACK ?\$
 !\$TRACK number\$
 !\$IGNORED TRACK reason\$
 <i>Return current track number</i>





 \$TRACK TOT\$
 !\$TRACK TOT number\$
 !\$IGNORED TRACK reason\$
 <i>Return total number of tracks.</i>






Note:





TRACK and CHAPTER commands perform the same operations and can be used for both CD and DVD disc types.





3.3.1.8: CHAPTER

 \$CHAPTER +\$
 !\$CHAPTER number\$
 !\$IGNORED CHAPTER reason\$
 <i>Select next (available) chapter.</i>

 \$CHAPTER -\$
 !\$CHAPTER number\$
 !\$IGNORED CHAPTER reason\$
 <i>Select previous (available) chapter.</i>

 \$CHAPTER number\$
 !\$CHAPTER number\$
 !\$CHAPTER BADCHAPTER\$
 !\$IGNORED CHAPTER reason\$
 <i>Select chapter number</i>

 \$CHAPTER ?\$
 !\$CHAPTER number\$
 !\$IGNORED CHAPTER reason\$
 <i>Return current chapter number</i>

 \$CHAPTER TOT\$
 !\$CHAPTER TOT number\$
 !\$IGNORED CHAPTER reason\$
 <i>Return total number of chapters.</i>

Note:

TRACK and CHAPTER commands perform the same operations and can be used for both CD and DVD disc types.

3.3.1.9: DISCINFO




 \$DISCINFO ?\$
 !\$DISCINFO disc type stream type
 <i>Return disc type and stream type.</i>




Note:




Where disc type is: *DISC_*
followed by: *CDDA, SACD, VCD, SVCD, DVD, DVDA, DATA, UNKNOWN, LOADING, NODISC*
or *UNDEFINED*.




And stream type is: *STREAM_*
followed by: *DOLBY, WMA, MP3, CDDA, DTS, LPCM, DSD_STEREO, DSD_MULTI,*
DSD_STEREO_DOWNMIX, MUSICAM, SDDS, PCM, DMC, MLP or *UNKNOWN*.

3.3.1.10: NAMEINFO

 \$NAMEINFO ?\$
 !\$NAMEINFO TRACK [UNKNOWN name] ARTIST [UNKNOWN name] ALBUM [UNKNOWN name]\$
 <i>Return track ,artist and album name information for current track.</i>

 \$NAMEINFO TRACK ?\$
 !\$NAMEINFO TRACK [UNKNOWN name]\$
 <i>Return track name information for current track.</i>






 \$NAMEINFO ARTIST ?\$
 !\$NAMEINFO ARTIST [UNKNOWN name]\$
 <i>Return artist name information for current track.</i>






 \$NAMEINFO ALBUM ?\$
 !\$NAMEINFO ALBUM [UNKNOWN name]\$
 <i>Return album name information for current track.</i>





Note:







This command is specifically for SACDs, therefore names will always be returned as *UNKNOWN* if disc type is not *SACD*.

3.3.1.11: SEARCH





 \$SEARCH < speed\$
 !\$SEARCH < speed\$
 !\$IGNORED SEARCH reason\$
 Search backwards through disc until STOP command is received.
 Where speed is 2X, 4X, 6X or 8X





 \$SEARCH > speed\$
 !\$SEARCH > speed\$
 !\$IGNORED SEARCH reason\$
 Search forwards through disc until STOP command is received.
 Where speed is 2X, 4X, 6X or 8X





 \$SEARCH STOP\$
 !\$SEARCH STOP\$
 !\$IGNORED SEARCH reason\$
 Stop searching disc





 \$SEARCH ?\$	Not Implemented
 !\$SEARCH STOP\$	
 !\$SEARCH <\$	
 !\$SEARCH >\$	
 !\$IGNORED SEARCH reason\$	
 Return current search status	





3.3.1.12: TIME

 \$TIME DISC BEG\$
 !\$TIME DISC BEG minutes seconds\$
 !\$IGNORED TIME reason\$
 <i>Set the time mode to return the elapsed time of the disc</i>





 \$TIME DISC END\$
 !\$TIME DISC END minutes seconds\$
 !\$IGNORED TIME reason\$
 <i>Set the time mode to return the remaining time of the disc</i>







 \$TIME DISC TOT\$
 !\$TIME DISC TOT minutes seconds\$
 !\$IGNORED TIME reason\$
 <i>Return the total time of the disc</i>

 \$TIME TRACK BEG\$
 !\$TIME TRACK BEG minutes seconds\$
 !\$IGNORED TIME reason\$
 <i>Set the time mode to return the elapsed time of the track</i>





 \$TIME TRACK END\$
 !\$TIME TRACK END minutes seconds\$
 !\$IGNORED TIME reason\$
 <i>Set the time mode to return the remaining time of the track</i>





 \$TIME TRACK TOT\$
 !\$TIME TRACK TOT minutes seconds\$
 !\$IGNORED TIME reason\$
 <i>Return the total time of the track</i>






 \$TIME OFF\$
 !\$TIME OFF\$
 !\$IGNORED TIME reason\$
 <i>Set the time mode to off.</i>





 \$TIME ?\$
 !\$TIME [DISC TRACK] BEG minutes seconds\$
 !\$TIME [DISC TRACK] END minutes seconds\$
 !\$TIME [DISC TRACK] TOT minutes seconds\$
 !\$IGNORED TIME reason\$
 <i>Return the time elapsed/remaining/total as set by commands above or by the handset</i>





3.3.1.13: PROGRAM (Unidisk 1.1/2.1)





 \$PROGRAM INCLUDE track [track [...]]\$
 !\$PROGRAM INCLUDE track [track [...]]\$
 !\$IGNORED PROGRAM reason\$
 <i>Create new program list including tracks listed</i>

 \$PROGRAM EXCLUDE track [track [...]]\$
 !\$PROGRAM EXCLUDE track [track [...]]\$
 !\$IGNORED PROGRAM reason\$
 <i>Create new program list excluding tracks listed</i>

 \$PROGRAM RANDOM\$
 !\$PROGRAM RANDOM\$
 !\$IGNORED PROGRAM reason\$
 <i>Generates a random play list of tracks and repeats it continuously</i>
 <i>Tracks are re-randomised on each repeat</i>

 \$PROGRAM SHUFFLE\$
 !\$PROGRAM SHUFFLE\$
 !\$IGNORED PROGRAM reason\$
 <i>Generates a random play list of tracks and repeats it once</i>

 \$PROGRAM CLEAR\$
 !\$PROGRAM CLEAR\$
 !\$IGNORED PROGRAM reason\$
 <i>Clear current program list</i>

 \$PROGRAM [N OFF]\$
 !\$PROGRAM OFF\$
 !\$IGNORED PROGRAM reason\$
 <i>Turn program off</i>









 \$PROGRAM ?\$
 !\$PROGRAM OFF NONE\$
 !\$PROGRAM ON INCLUDE\$
 !\$PROGRAM ON EXCLUDE\$
 !\$PROGRAM ON RANDOM\$
 !\$PROGRAM ON SHUFFLE\$
 !\$IGNORED PROGRAM reason\$
 <i>Return current program status</i>






Note:





¹ The number of tracks is limited to 15 for the INCLUDE/EXCLUDE program commands.





² The 'PROGRAM ?' command does not currently return a list of tracks, for the INCLUDE, EXCLUDE, RANDOM and SHUFFLE responses.

3.3.1.14: PROGRAM (Unidisk SC)

 \$PROGRAM [INCLUDE EXCLUDE] track [track [...]]\$
 !\$PROGRAM [INCLUDE EXCLUDE] track [track [...]]\$
 !\$PROGRAM [INCLUDE EXCLUDE] ACTIVEPROGRAM\$
 !\$PROGRAM [INCLUDE EXCLUDE] BADPROGRAM\$
 !\$IGNORED PROGRAM reason\$
 <i>Create new program list including or excluding tracks listed</i>
 <i>ACTIVEPROGRAM response given where an inclusive or exclusive program is currently active.</i>
 <i>BADPROGRAM response given when no valid tracks</i>

 \$PROGRAM RANDOM\$
 !\$PROGRAM RANDOM\$
 !\$IGNORED PROGRAM reason\$
 <i>Generates a random play list of tracks and repeats it continuously</i>
 <i>Tracks are re-randomised on each repeat</i>

 \$PROGRAM SHUFFLE\$
 !\$PROGRAM SHUFFLE\$
 !\$IGNORED PROGRAM reason\$
 <i>Generates a random play list of tracks and repeats it once</i>

 \$PROGRAM [N OFF]\$
 !\$PROGRAM OFF\$
 !\$IGNORED PROGRAM reason\$
 <i>Turn program off (only allowed when disc is stopped)</i>

 \$PROGRAM ?\$
 !\$PROGRAM OFF NONE\$
 !\$PROGRAM ON INCLUDE\$
 !\$PROGRAM ON EXCLUDE\$
 !\$PROGRAM ON RANDOM\$
 !\$PROGRAM ON SHUFFLE\$
 !\$IGNORED PROGRAM reason\$
 <i>Return current program status</i>






Notes:





¹ The program command is specifically for CD and SACD discs.






² The number of tracks is limited to 15 for the INCLUDE/EXCLUDE program commands.







³ The 'PROGRAM ?' command does not currently return a list of tracks, for the INCLUDE, EXCLUDE, RANDOM and SHUFFLE responses.






3.3.1.15: REPEAT









 \$REPEAT [Y ON]\$
 !\$REPEAT ON\$
 !\$IGNORED REPEAT reason\$
 Turn repeat on
 If a program is currently active then the program will be repeated, otherwise the entire disc will be repeated

 \$REPEAT [N OFF]\$
 !\$REPEAT OFF\$
 !\$IGNORED REPEAT reason\$
 Turn repeat off





 \$REPEAT BEG\$
 !\$REPEAT BEG\$
 !\$IGNORED REPEAT reason\$
 Mark start of repeat section






 \$REPEAT END\$
 !\$REPEAT END\$
 !\$REPEAT BADREPEAT\$
 !\$IGNORED REPEAT reason\$
 Mark end of repeat section and start to repeat
 This command must be preceded at some point by a \$REPEAT BEG\$ command

 \$REPEAT TRACK\$
 !\$REPEAT TRACK\$
 !\$IGNORED REPEAT reason\$
 Repeat current track






 \$REPEAT ?\$
 !\$REPEAT ON\$
 !\$REPEAT OFF\$
 !\$REPEAT TRACK\$
 !\$REPEAT A\$
 !\$REPEAT A-B\$
 !\$IGNORED REPEAT reason\$
 Return current repeat status

3.3.1.16: SKIP





 \$SKIP +\$
 !\$SKIP +\$
 !\$IGNORED SKIP reason\$
 <i>Select next track or chapter.</i>





 \$SKIP -\$
 !\$SKIP -\$
 !\$IGNORED SKIP reason\$
 <i>Select previous track or chapter.</i>





3.3.1.17: ZOOM





 \$ZOOM +\$
 !\$ZOOM +\$
 !\$IGNORED ZOOM reason\$
 <i>Select next zoom level.</i>





3.3.1.18: KEY

 \$KEY [UP DOWN]\$
 !\$KEY [UP DOWN]\$
 !\$IGNORED [UP DOWN] reason\$
 <i>Move picture up/down or navigate menu up/down.</i>

 \$KEY [LEFT RIGHT]\$
 !\$KEY [LEFT RIGHT]\$
 !\$IGNORED [LEFT RIGHT] reason\$
 <i>Move picture left/right or navigate menu left/right.</i>





 \$KEY ENTER\$
 !\$KEY ENTER\$
 !\$IGNORED ENTER reason\$
 <i>Select menu item etc.</i>

 \$KEY AUDIO\$
 !\$KEY AUDIO\$
 !\$IGNORED AUDIO reason\$
 <i>Toggle through available audio tracks (DVD)</i>





 \$KEY SUBTITLE\$
 !\$KEY SUBTITLE\$
 !\$IGNORED SUBTITLE reason\$
 <i>Toggle through available subtitles (DVD)</i>




Note: Although the key command will be sent and a response returned, there is no guarantee that the command will be executed (depends on disc type and mode of operation).

3.3.1.19: ANGLE






 \$ANGLE +\$
 !\$ANGLE +\$
 !\$IGNORED ANGLE reason\$
 <i>Change Angle</i>







3.3.1.20: MENU







 \$MENU TITLE\$
 !\$MENU TITLE tt\$
 !\$IGNORED MENU reason\$
 <i>Enable MENU Title return tt title number</i>

 \$MENU DVD\$
 !\$MENU DVD\$
 <i>Return to DVD root menu</i>





3.3.1.21: LAYER

 \$LAYER ?\$
 !\$LAYER CDDA\$
 !\$LAYER DSD_STEREO\$
 !\$LAYER DSD_MULTI\$
 !\$IGNORED LAYER reason\$
 <i>Return the current SACD Layer setting</i>








 \$LAYER [CDDA DSD_STEREO DSD_MULTI]\$
 !\$LAYER CDDA\$
 !\$LAYER DSD_STEREO\$
 !\$LAYER DSD_MULTI\$
 !\$IGNORED LAYER reason\$
 <i>Changes the current SACD Layer</i>

 \$LAYER +\$
 !\$LAYER CDDA\$
 !\$LAYER DSD_STEREO\$
 !\$LAYER DSD_MULTI\$
 !\$IGNORED LAYER reason\$
 <i>Moves on to the next (available) SACD Layer</i>

3.3.1.22: DISCID




 \$DISCID\$
 !\$DISCID identifier\$
 !\$IGNORED DISCID reason\$
 <i>Return disc identifier (CD only), where identifier is an eight digit hexadecimal value.</i>




3.3.1.23: DISCTOC




 \$DISCTOC\$
 !\$DISCTOC TOTAL tracks\$
 !\$DISCTOC ENTRIES time [...time]\$
 !\$IGNORED DISCTOC reason\$
 <i>Return disc table of contents (CD and SACD only).</i>
 <i>The TOTAL reply states the number of tracks of the CD/SACD.</i>
 <i>The ENTRIES reply (one or more) will return the time for each track in seconds (maximum of ten track times per reply). Track times will be returned in track order.</i>




3.3.2: AUDIO COMMANDS

3.3.2.1: STANDBY

 \$STANDBY ?\$
 !\$STANDBY [ON OFF]\$
 <i>Return current standby status.</i>

 \$STANDBY [Y ON]\$
 !\$STANDBY [ON OFF]\$
 <i>Enter standby.</i>

 \$STANDBY [N OFF]\$
 !\$STANDBY [ON OFF]\$
 <i>Exit standby.</i>

 \$STANDBY TOGGLE\$
 !\$STANDBY [ON OFF]\$
 <i>Toggle standby.</i>

Important

The remaining commands in this section are only available on the Unidisk SC. Furthermore, the commands will only be accepted if the 'KNEKT_MODE' user option has been set to 'AUTO', 'ROOM' or 'MAIN' (see 3.3.5.1.9: KNEKT_MODE).

In the case where the user option has been set to 'SOURCE', responses will be of the form ...




\$IGNORED *command* DISABLED\$




where	IGNORED	is the ignored field
	<i>command</i>	is the command being ignored
	DISABLED	is the reason the command was ignored (preamplifier controls disabled).




For example, **\$LISTEN ?\$**

Would respond, **\$IGNORED LISTEN DISABLED\$**




3.3.2.2: LISTEN




 \$LISTEN [+ -]\$
 !\$LISTEN source\$
 <i>Select next or previous available source.</i>



 \$LISTEN [DISC DIG1 DIG2 DIG3 DIG4 AUX1 AUX2 TV VCR MAIN]\$
 !\$LISTEN source\$
 <i>Select supplied source.</i>

 \$LISTEN ?\$
 !\$LISTEN source\$
 <i>Return currently selected source.</i>




3.3.2.3: MUTE




 \$MUTE [Y ON]\$
 !\$MUTE [ON OFF]\$
 <i>Mute on.</i>




 \$MUTE [N OFF]\$
 !\$MUTE [ON OFF]\$
 <i>Mute off.</i>




 \$MUTE ?\$
 !\$MUTE [ON OFF]\$
<i>Return current mute status.</i>

3.3.2.4: VOL / VOLUME




 <code>\$(VOL VOLUME) [+ -]\$(</code>
 <code>!\$(VOL VOLUME) value\$(</code>
 <i>Increase or decrease current volume by one.</i>




 <code>\$(VOL VOLUME) (+ -)value\$(</code>
 <code>!\$(VOL VOLUME) value\$(</code>
 <i>Increase or decrease current volume by supplied value</i>




 <code>\$(VOL VOLUME) = (+)value\$(</code>
 <code>!\$(VOL VOLUME) value\$(</code>
 <i>Set volume to absolute value supplied.</i>




 <code>\$(VOL VOLUME) ?\$(</code>
 <code>!\$(VOL VOLUME) value\$(</code>
 <i>Return current volume setting (0 to 100 inclusive).</i>

3.3.2.5: BAL / BALANCE




 <code>\$(BAL BALANCE) [+ -]\$(</code>
 <code>!\$(BAL BALANCE) value\$(</code>
 <i>Increase or decrease current balance by one.</i>




 <code>\$(BAL BALANCE) (+ -)value\$(</code>
 <code>!\$(BAL BALANCE) value\$(</code>
 <i>Increase or decrease current balance by supplied value</i>



 <code>\$(BAL BALANCE) = (+ -)value\$(</code>
 <code>!\$(BAL BALANCE) value\$(</code>
 <i>Set balance to absolute value supplied.</i>

 <code>\$(BAL BALANCE) ?\$(</code>
 <code>!\$(BAL BALANCE) value\$(</code>
 <i>Return current balance setting (-10 to +10 inclusive, left to right respectively).</i>

3.3.2.6: SURROUND

 \$SURROUND [+ -] \$
 !\$SURROUND mode \$
 <i>Select next or previous (available) surround mode.</i>




 \$SURROUND mode \$
 !\$SURROUND mode \$
 <i>Select specified surround mode (if available).</i>




 \$SURROUND ? \$
 !\$SURROUND mode \$
 <i>Return current surround mode.</i>




Where **mode** parameter is one of the following ...

STEREO STEREOSUB 3STEREO PHANTOM ASMIX DTSFULL

3.3.2.7: PROLOGICII

 \$PROLOGICII [+ -] \$
 !\$PROLOGICII mode \$
 <i>Select next or previous (available) Pro Logic II mode.</i>

 \$PROLOGICII mode \$
 !\$PROLOGICII mode \$
 <i>Select specified Pro Logic II mode (if available).</i>





 \$PROLOGICII ? \$
 !\$PROLOGICII mode \$
 <i>Return current Pro Logic II mode.</i>




Where **mode** parameter is one of the following ...




PROLOGIC MUSIC MOVIE MATRIX

3.3.3: SETUP COMMANDS

3.3.3.1: SETUP




 \$SETUP ?\$
 !\$SETUP ON\$
 !\$SETUP OFF\$
 <i>Return current setup menu status</i>




 \$SETUP [Y ON]\$
 !\$SETUP ON\$
 <i>Enter setup menu</i>




 \$SETUP [N OFF]\$
 !\$SETUP OFF\$
 <i>Exit setup menu</i>




3.3.3.2: TV

3.3.3.2.1: TYPE

 \$TV TYPE NATIVE\$
 !\$TV TYPE NATIVE\$
 <i>Set current TV TYPE to NATIVE</i>

 \$TV TYPE NTSC\$
 !\$TV TYPE NTSC\$
 <i>Set current TV TYPE to NTSC</i>

 \$TV TYPE PAL\$
 !\$TV TYPE PAL\$
 <i>Set current TV TYPE to PAL</i>







 \$TV TYPE ?\$
 !\$TV TYPE nnn\$
 <i>Return current TV TYPE setting</i>

Note:

¹ The TV type can only be changed when there is no disc in the tray or when the disc is stopped (data discs must be removed from the tray).

3.3.3.3: *SPEAKER (Unidisk SC only)*













3.3.3.3.1: *SIZE (Unidisk SC only)*

 \$\$SPEAKER SIZE speaker size\$
 !\$\$SPEAKER SIZE speaker size\$
 <i>Set speaker size.</i>
 \$\$SPEAKER SIZE speaker ?\$
 !\$\$SPEAKER SIZE speaker size\$
 <i>Return speaker size setting.</i>

Where **speaker** and **size** parameters are as follows ...

	<i>speaker</i>	<i>size</i>
front left and right	FRONT	[SMALL LARGE]
centre	CENTRE	[NONE SMALL LARGE]
surround left and right	SURROUND	[NONE SMALL LARGE]
subwoofer	SUBWOOFER	[NONE PRESENT]

3.3.3.3.2: *TRIM (Unidisk SC only)*

 \$\$SPEAKER TRIM speaker [+ -]\$
 !\$\$SPEAKER TRIM speaker trim\$
 <i>Increase or decrease current setting by one.</i>
 \$\$SPEAKER TRIM speaker (+ -)trim\$
 !\$\$SPEAKER TRIM speaker trim\$
 <i>Increase or decrease current setting by supplied value</i>
 \$\$SPEAKER TRIM speaker = (+ -)trim\$
 !\$\$SPEAKER TRIM speaker trim\$
 <i>Set to absolute value supplied.</i>
 \$\$SPEAKER TRIM speaker ?\$
 !\$\$SPEAKER TRIM speaker trim\$
 <i>Return current setting.</i>




Where **speaker** and **trim** parameters are as follows ...




	<i>speaker</i>	<i>trim (min)</i>	<i>trim (max)</i>
front left	FRONT_LEFT	-20	20
front right	FRONT_RIGHT	-20	20
centre	CENTRE	-20	20
surround left	SURROUND_LEFT	-20	20
surround right	SURROUND_RIGHT	-20	20
subwoofer	SUBWOOFER	-20	20

Note:




The trim value range equates to +/-10dB, in 0.5dB steps.




3.3.3.4: ASPECTRATIO

 \$ASPECTRATIO ?\$
 !\$ASPECTRATIO [3:4 LETTERBOX 16:9]\$
 <i>Return current aspect ratio setting.</i>

 \$ASPECTRATIO [3:4 LETTERBOX 16:9]\$
 !\$ASPECTRATIO [3:4 LETTERBOX 16:9]\$
 <i>Set aspect ratio to supplied value.</i>

3.3.3.5: NTSCTYPE

 \$NTSCTYPE ?\$
 !\$NTSCTYPE [WORLD NORTHAMERICAN]\$
 <i>Return current NTSC type setting.</i>




 \$NTSCTYPE [WORLD NORTHAMERICAN]\$
 !\$NTSCTYPE [WORLD NORTHAMERICAN]\$
 <i>Set NTSC type to supplied value.</i>




3.3.3.6: CHANNELSETUP

 \$CHANNELSETUP ?\$
 !\$CHANNELSETUP [2CHANNEL 5.1CHANNEL]\$
 <i>Return current channel setup setting.</i>

 \$CHANNELSETUP [2CHANNEL 5.1CHANNEL]\$
 !\$CHANNELSETUP [2CHANNEL 5.1CHANNEL]\$
 <i>Set channel setup to supplied value.</i>

3.3.3.7: SPDIFOUTPUT

 \$SPDIFOUTPUT ?\$
 !\$SPDIFOUTPUT [OFF RAW LTRTPCM]\$
 <i>Return current SPDIF output setting.</i>




 \$SPDIFOUTPUT [OFF RAW LTRTPCM]\$
 !\$SPDIFOUTPUT [OFF RAW LTRTPCM]\$
 <i>Set SPDIF output to supplied value.</i>




3.3.3.8: PRIMARYDISPLAYDEVICE

 \$PRIMARYDISPLAYDEVICE ?\$
 !\$PRIMARYDISPLAYDEVICE [INTERLACED PROGRESSIVE HDCP]\$
 <i>Return current primary display device setting.</i>




 \$PRIMARYDISPLAYDEVICE [INTERLACED PROGRESSIVE HDCP]\$
 !\$PRIMARYDISPLAYDEVICE [INTERLACED PROGRESSIVE HDCP]\$
 <i>Set primary display device to supplied value (HDCP not available on Unidisk SC).</i>




3.3.3.9: CLOSEDCAPTIONS

 \$CLOSEDCAPTIONS ?\$
 !\$CLOSEDCAPTIONS [ON OFF]\$
 <i>Return current closed captions setting.</i>




 \$CLOSEDCAPTIONS [ON OFF]\$
 !\$CLOSEDCAPTIONS [ON OFF]\$
 <i>Set closed captions to supplied value.</i>




3.3.3.10: DOWNMIX

 \$DOWNMIX ?\$
 !\$DOWNMIX [PURESTEREO LTRT]\$
 <i>Return current downmix setting.</i>

 \$DOWNMIX [PURESTEREO LTRT]\$
 !\$DOWNMIX [PURESTEREO LTRT]\$
 <i>Set downmix to supplied value.</i>

3.3.3.11: LPCMOUTPUT

 \$LPCMOUTPUT ?\$
 !\$LPCMOUTPUT [48K 96K]\$
 <i>Return current LPCM output setting.</i>




 \$LPCMOUTPUT [PURESTEREO LTRT]\$
 !\$LPCMOUTPUT [48K 96K]\$
 <i>Set LPCM output to supplied value.</i>




3.3.3.12: DUALMONO

 \$DUALMONO ?\$
 !\$DUALMONO [STEREO LEFTMONO RIGHTMONO MIXMONO]\$
 <i>Return current Dual/Mono setting.</i>

 \$DUALMONO [STEREO LEFTMONO RIGHTMONO MIXMONO]\$
 !\$DUALMONO [STEREO LEFTMONO RIGHTMONO MIXMONO]\$
 <i>Set Dual/Mono to supplied value.</i>

3.3.3.13: MIDNIGHTMOVIE

 \$MIDNIGHTMOVIE ?\$
 !\$MIDNIGHTMOVIE [ON OFF]\$
 <i>Return current midnight movie setting.</i>




 \$MIDNIGHTMOVIE [ON OFF]\$
 !\$MIDNIGHT [ON OFF]\$
 <i>Set midnight movie to supplied value.</i>




3.3.4: OPTION COMMANDS FOR UNIDISK 1.1 / 2.1





This section details the option commands available for the Unidisk 1.1 and 2.1 products.

3.3.4.1: OPTION

3.3.4.1.1: DISPLAY




 \$OPTION DISPLAY value\$
 !\$OPTION DISPLAY value\$
 <i>Set display brightness to value supplied.</i>





 \$OPTION DISPLAY AUTO\$
 !\$OPTION DISPLAY AUTO\$
 <i>Set display brightness to auto (automatically adjusts according to ambient light level)</i>

 \$OPTION DISPLAY ?\$
 !\$OPTION DISPLAY [value AUTO]\$
 <i>Return current brightness status (1-100% inclusive or AUTO)</i>
 <i>Default setting [AUTO].</i>

3.3.4.1.2: SLEEP_DISPLAY_DELAY

Not currently implemented.

 \$OPTION SLEEP DISPLAY DELAY [seconds OFF]\$
 !\$OPTION SLEEP DISPLAY DELAY [seconds OFF]\$
 <i>Set time delay before sleep display is shown.</i>

 \$OPTION SLEEP DISPLAY DELAY ?\$
 !\$OPTION SLEEP DISPLAY DELAY [seconds OFF]\$
 <i>Return time delay before sleep display is shown.</i>
 <i>Default setting [OFF].</i>




Note:





¹ A delay of 0 seconds will disable the sleep display.

² The time delay is specified in seconds, with a range of 0 to 300 seconds (5 minutes) in 10 second steps.

³ The time delay is relative to last user operation via either the handset or front panel.




3.3.4.1.3: IR_COMMANDS





 \$OPTION IR_COMMANDS [OFF ON]\$
 !\$OPTION IR_COMMANDS [OFF ON]\$
 Accept or ignore IR commands received via the front panel.

 \$OPTION IR_COMMANDS ?\$
 !\$OPTION IR_COMMANDS [OFF ON]\$
 Return current status of IR command processing received via front panel.
 Default setting [ON].

Note: This command provides the same functionality as the IR command.

3.3.4.1.4: IR_RC5_OUT

 \$OPTION IR_RC5_OUT [OFF ON]\$
 !\$OPTION IR_RC5_OUT [OFF ON]\$
 Enable or disabled passing of front panel IR commands to Remote Out




 \$OPTION IR_RC5_OUT ?\$
 !\$OPTION IR_RC5_OUT [OFF ON]\$
 Return current status of passing front panel IR commands to Remote Out.
 Default setting [ON].





3.3.4.1.5: RC5_IN_OUT

 \$OPTION RC5_IN_OUT [OFF ON]\$
 !\$OPTION RC5_IN_OUT [OFF ON]\$
 Enable or disable passing of commands from Remote In to Remote Out.

 \$OPTION RC5_IN_OUT ?\$
 !\$OPTION RC5_IN_OUT [OFF ON]\$
 Return current status of passing commands from Remote In to Remote Out.
 Default setting [ON].




3.3.4.1.6: RS232_BAUDRATE





 \$OPTION RS232_BAUDRATE baudrate\$
 !\$OPTION RS232_BAUDRATE baudrate\$
 Set baud rate to one of the following: 4800, 9600, 14400, 19200, 28800, 38400, 57600, 115200, 230400

 \$OPTION RS232_BAUDRATE ?\$
 !\$OPTION RS232_BAUDRATE baudrate\$
 Return current RS232 baudrate setting
 Default setting [9600].




Note: This command provides the same functionality as the BAUD command.





3.3.4.1.7: RS232_EVENTS

 \$OPTION RS232_EVENTS [OFF ON]\$
 !\$OPTION RS232_EVENTS [OFF ON]\$
 Enable or disable unsolicited RS232 events




 \$OPTION RS232_EVENTS ?\$
 !\$OPTION RS232_EVENTS [OFF ON]\$
 Return current unsolicited RS232 events status
 Default setting [OFF].





3.3.4.1.8: RS232_MESSAGE

 \$OPTION RS232_MESSAGE [OFF ON]\$
 !\$OPTION RS232_MESSAGE [OFF ON]\$
 Enable or disable RS232 startup message

 \$OPTION RS232_MESSAGE ?\$
 !\$OPTION RS232_MESSAGE [OFF ON]\$
 Return current RS232 startup message status
 Default setting [ON].

3.3.4.1.9: CD_COMMANDS

 \$OPTION CD_COMMANDS [OFF ON]\$
 !\$OPTION CD_COMMANDS [OFF ON]\$
 Enable or disable control of product with CD commands

 \$OPTION CD_COMMANDS ?\$
 !\$OPTION CD_COMMANDS [OFF ON]\$
 Return current CD command control status
 Default setting [ON].

3.3.4.1.10: SCROLL_TEXT

 \$OPTION SCROLL_TEXT [OFF ON LOOP]\$
 !\$OPTION SCROLL_TEXT [OFF ON LOOP]\$
 Enable or disable scrolling of SACD track, artist and album names (LOOP means continuous scrolling).

 \$OPTION SCROLL_TEXT ?\$
 !\$OPTION SCROLL_TEXT [OFF ON LOOP]\$
 Return current SACD text scrolling status.
 Default setting [ON].

3.3.5: OPTION COMMANDS FOR UNIDISK SC





This section details the option commands available for the Unidisk SC product.

3.3.5.1: OPTION




3.3.5.1.1: DISPLAY_BRIGHTNESS





 \$OPTION DISPLAY BRIGHTNESS value\$
 !\$OPTION DISPLAY BRIGHTNESS value\$
 <i>Set display brightness to value supplied.</i>

 \$OPTION DISPLAY BRIGHTNESS AUTO\$
 !\$OPTION DISPLAY BRIGHTNESS AUTO\$
 <i>Set display brightness to auto (automatically adjusts according to ambient light level)</i>

 \$OPTION DISPLAY BRIGHTNESS ?\$
 !\$OPTION DISPLAY BRIGHTNESS [value AUTO]\$
 <i>Return current brightness status (1-100% inclusive or AUTO)</i>
 <i>Default setting [AUTO].</i>

3.3.5.1.2: SLEEP_DISPLAY_DELAY

 \$OPTION SLEEP DISPLAY DELAY [seconds OFF]\$
 !\$OPTION SLEEP DISPLAY DELAY [seconds OFF]\$
 <i>Set time delay before sleep display is shown.</i>

 \$OPTION SLEEP DISPLAY DELAY ?\$
 !\$OPTION SLEEP DISPLAY DELAY [seconds OFF]\$
 <i>Return time delay before sleep display is shown.</i>
 <i>Default setting [OFF].</i>

Note:





¹ A delay of 0 seconds will disable the sleep display.

² The time delay is specified in seconds, with a range of 0 to 300 seconds (5 minutes) in 10 second steps.

³ The time delay is relative to last user operation via either the handset or front panel.




3.3.5.1.3: FRONT_PANEL_IR_COMMANDS





 <code>\$OPTION FRONT PANEL IR COMMANDS [ACCEPTED IGNORED]\$</code>
 <code>!\$OPTION FRONT PANEL IR COMMANDS [ACCEPTED IGNORED]\$</code>
 <i>Accept or ignore IR commands received via the front panel.</i>

 <code>\$OPTION FRONT PANEL IR COMMANDS ?\$</code>
 <code>!\$OPTION FRONT PANEL IR COMMANDS [ACCEPTED IGNORED]\$</code>
 <i>Return current status of IR command processing received via front panel.</i>
 <i>Default setting [ACCEPTED].</i>




Note: This command provides the same functionality as the IR command.





3.3.5.1.4: PASS_IR_TO_REMOTE_OUT

 <code>\$OPTION PASS IR TO REMOTE OUT [ENABLED DISABLED]\$</code>
 <code>!\$OPTION PASS IR TO REMOTE OUT [ENABLED DISABLED]\$</code>
 <i>Enable or disabled passing of front panel IR commands to Remote Out</i>




 <code>\$OPTION PASS IR TO REMOTE OUT ?\$</code>
 <code>!\$OPTION PASS IR TO REMOTE OUT [ENABLED DISABLED]\$</code>
 <i>Return current status of passing front panel IR commands to Remote Out.</i>
 <i>Default setting [ENABLED].</i>





3.3.5.1.5: PASS_REMOTE_IN_TO_OUT

 <code>\$OPTION PASS REMOTE IN TO OUT [ENABLED DISABLED]\$</code>
 <code>!\$OPTION PASS REMOTE IN TO OUT [ENABLED DISABLED]\$</code>
 <i>Enable or disable passing of commands from Remote In to Remote Out.</i>

 <code>\$OPTION PASS REMOTE IN TO OUT ?\$</code>
 <code>!\$OPTION PASS REMOTE IN TO OUT [ENABLED DISABLED]\$</code>
 <i>Return current status of passing commands from Remote In to Remote Out.</i>
 <i>Default setting [ENABLED].</i>




3.3.5.1.6: IR_OUT_MODULATION





 **\$OPTION IR_OUT_MODULATION value\$**
 **!\$OPTION IR_OUT_MODULATION value\$**
 Set IR flasher modulation frequency to value supplied (value specified in kHz).

 **\$OPTION IR_OUT_MODULATION ?\$**
 **!\$OPTION IR_OUT_MODULATION value\$**
 Return current status of IR flasher modulation frequency (10 to 2304(kHz) inclusive).
 Default setting [36].




Note: Not all frequencies are valid, so the value returned will be the nearest applicable value.

3.3.5.1.7: ACC_SOCKET_MODE

 **\$OPTION ACC_SOCKET_MODE [IR|RCU]\$**
 **!\$OPTION ACC_SOCKET_MODE [IR|RCU]\$**
 Set accessory socket mode.

 **\$OPTION ACC_SOCKET_MODE ?\$**
 **!\$OPTION ACC_SOCKET_MODE [IR|RCU]\$**
 Return current accessory socket mode.
 Default setting [IR].





3.3.5.1.8: KNEKT_MODE

 **\$OPTION KNEKT_MODE [AUTO|MAIN|ROOM|SOURCE]\$**
 **!\$OPTION KNEKT_MODE [AUTO|MAIN|ROOM|SOURCE]\$**
 Set Knekt mode.

 **\$OPTION KNEKT_MODE ?\$**
 **!\$OPTION KNEKT_MODE [AUTO|MAIN|ROOM|SOURCE]\$**
 Return current Knekt mode.
 Default setting [AUTO].





3.3.5.1.9: KNEKT_AUDIO

 **\$OPTION KNEKT_AUDIO [PURE STEREO|SURROUND ENCODED]\$**
 **!\$OPTION KNEKT_AUDIO [PURE STEREO|SURROUND ENCODED]\$**
 Set Knekt audio mode.




 **\$OPTION KNEKT_AUDIO ?\$**
 **!\$OPTION KNEKT_AUDIO [PURE STEREO|SURROUND ENCODED]\$**
 Return current Knekt audio mode.
 Default setting [PURE STEREO].





3.3.5.1.10: *KNEKT_LFE*

 \$OPTION KNEKT LFE [INCLUDED EXCLUDED]\$
 !\$OPTION KNEKT LFE [INCLUDED EXCLUDED]\$
 <i>Include or exclude low frequency effects in Knekt audio.</i>

 \$OPTION KNEKT LFE ?\$
 !\$OPTION KNEKT LFE [INCLUDED EXCLUDED]\$
 <i>Return whether or not low frequency effects are included in Knekt audio.</i>
 <i>Default setting [INCLUDED].</i>

3.3.5.1.11: *RS232_BAUDRATE*


 \$OPTION RS232 BAUDRATE baudrate\$
 !\$OPTION RS232 BAUDRATE baudrate\$
 <i>Set baud rate to one of the following: 4800, 9600, 14400, 19200, 28800, 38400, 57600, 115200, 230400</i>

 \$OPTION RS232 BAUDRATE ?\$
 !\$OPTION RS232 BAUDRATE baudrate\$
 <i>Return current RS232 baudrate setting</i>
 <i>Default setting [9600].</i>




Note: This command provides the same functionality as the BAUD command.





3.3.5.1.12: *RS232_EVENTS*

 \$OPTION RS232 EVENTS [ENABLED DISABLED]\$
 !\$OPTION RS232 EVENTS [ENABLED DISABLED]\$
 <i>Enable or disable unsolicited RS232 events</i>

 \$OPTION RS232 EVENTS ?\$
 !\$OPTION RS232 EVENTS [ENABLED DISABLED]\$
 <i>Return current unsolicited RS232 events status</i>
 <i>Default setting [DISABLED].</i>





3.3.5.1.13: *RS232_STARTUP_MESSAGE*

 \$OPTION RS232 STARTUP MESSAGE [ENABLED DISABLED]\$
 !\$OPTION RS232 STARTUP MESSAGE [ENABLED DISABLED]\$
 <i>Enable or disable RS232 startup message</i>




 \$OPTION RS232 STARTUP MESSAGE ?\$
 !\$OPTION RS232 STARTUP MESSAGE [ENABLED DISABLED]\$
 <i>Return current RS232 startup message status</i>
 <i>Default setting [ENABLED].</i>





3.3.5.1.14: CD_COMMANDS

 \$OPTION CD_COMMANDS [ACCEPTED IGNORED]\$
 !\$OPTION CD_COMMANDS [ACCEPTED IGNORED]\$
 <i>Enable or disable control of product with CD commands</i>


 \$OPTION CD_COMMANDS ?\$
 !\$OPTION CD_COMMANDS [ACCEPTED IGNORED]\$
 <i>Return current CD command control status</i>
 <i>Default setting [ACCEPTED].</i>

3.3.5.1.15: PLAY_COMMAND

 \$OPTION PLAY_COMMAND [PLAY ONLY PLAY PAUSE]\$
 !\$OPTION PLAY_COMMAND [PLAY ONLY PLAY PAUSE]\$
 <i>Set action on receipt of play command (always plays, or toggles between play and pause)</i>




 \$OPTION PLAY_COMMAND ?\$
 !\$OPTION PLAY_COMMAND [PLAY ONLY PLAY PAUSE]\$
 <i>Return current action on receipt of play command.</i>
 <i>Default setting [PLAY_PAUSE].</i>




3.3.5.1.16: STOP_COMMAND

 \$OPTION STOP_COMMAND [STOP ONLY STOP EJECT]\$
 !\$OPTION STOP_COMMAND [STOP ONLY STOP EJECT]\$
 <i>Set action on receipt of stop command (always stops, or stops/ejects depending on play mode).</i>

 \$OPTION STOP_COMMAND ?\$
 !\$OPTION STOP_COMMAND [STOP ONLY STOP EJECT]\$
 <i>Return current action on receipt of stop command.</i>
 <i>Default setting [STOP_EJECT].</i>

3.3.5.1.17: REPEAT_COMMAND

 \$OPTION REPEAT_COMMAND [REPEAT ALL REPEAT AB ALL]\$
 !\$OPTION REPEAT_COMMAND [REPEAT ALL REPEAT AB ALL]\$
 <i>Set action on receipt of repeat command (always acts as repeat all, or press/release means repeat A-B and press/hold means repeat all).</i>

 \$OPTION REPEAT_COMMAND ?\$
 !\$OPTION REPEAT_COMMAND [REPEAT ALL REPEAT AB ALL]\$
 <i>Return current action on receipt of repeat command.</i>
 <i>Default setting [REPEAT_ALL].</i>




3.3.5.1.18: *AUTO_SOURCE_SELECTION_DISC*

 \$OPTION AUTO SOURCE SELECTION DISC [ENABLED DISABLED]\$
 !\$OPTION AUTO SOURCE SELECTION DISC [ENABLED DISABLED]\$
 <i>Enable or disable automatic selection of disc source upon receipt of a disc command.</i>


 \$OPTION AUTO SOURCE SELECTION DISC ?\$
 !\$OPTION AUTO SOURCE SELECTION DISC [ENABLED DISABLED]\$
 <i>Return current status of automatic selection of disc source upon receipt of disc command.</i>
 <i>Default setting [ENABLED].</i>





3.3.5.1.19: *SOURCE_MEMORY*

 \$OPTION SOURCE MEMORY [ENABLED DISABLED]\$
 !\$OPTION SOURCE MEMORY [ENABLED DISABLED]\$
 <i>Enable or disable saving of preamplifier information.</i>

 \$OPTION SOURCE MEMORY ?\$
 !\$OPTION SOURCE MEMORY [ENABLED DISABLED]\$
 <i>Return current status of saving of preamplifier information.</i>
 <i>Default setting [DISABLED].</i>




3.3.5.1.20: *HIRES_SACD_DVDA_AUDIO*

 \$OPTION HIRES SACD DVDA AUDIO [DIRECT NORMAL]\$
 !\$OPTION HIRES SACD DVDA AUDIO [DIRECT NORMAL]\$
 <i>Set whether or not SACD and DVDA audio streams are sent without processing (DIRECT) or with processing (NORMAL ('with processing' means that bass redirect is active))</i>

 \$OPTION HIRES SACD DVDA AUDIO ?\$
 !\$OPTION HIRES SACD DVDA AUDIO [DIRECT NORMAL]\$
 <i>Return current status of SACD and DVDA audio stream processing.</i>
 <i>Default setting [DIRECT].</i>






3.3.5.1.21: *SCROLL_SACD_TEXT*

 \$OPTION SCROLL SACD TEXT [OFF ONCE LOOP]\$
 !\$OPTION SCROLL SACD TEXT [OFF ONCE LOOP]\$
 <i>Enable or disable scrolling of SACD track, artist and album names (LOOP means continuous scrolling).</i>

 \$OPTION SCROLL SACD TEXT ?\$
 !\$OPTION SCROLL SACD TEXT [OFF ONCE LOOP]\$
 <i>Return current SACD text scrolling status.</i>
 <i>Default setting [ONCE].</i>

Appendice A : Format Of Command Table

Commands are described using the following format:

 \$COMMAND parameters\$	-	actual command
 !\$COMMAND response 1\$	-	list of possible responses
		
 !\$COMMAND response n\$		
 <i>Description</i>	-	brief description of command

Each table describes one variation of the command, therefore, for a command with five variations there will be five tables. In cases of a command where there may be more than one form of response, all forms of the response will be listed.

The following conventions apply:

\$COMMAND parameters\$	-	is the command variation
!\$COMMAND response\$	-	is the response to a command
!\$FAIL sc fn\$	-	is the response to a failed command
All uppercase words are keywords	-	all commands and system parameters must be supplied in uppercase
All lowercase words represent a parameter	-	ie. number means supply a numeric value
Parameter's shown as, '(p1)'	-	means the value is optional
Parameter's shown as, '[p1 p2 p3]'	-	means use one of these values
Parameter's shown as, 'p1 [p2 [...]]'	-	means supply one or more values

Appendice B : Escape Sequences

Previous implementations of the RS232 protocol, excluded the use of specific characters within identifiers (#, \$, &, @ and spaces) and the command itself. These characters may now be included by using the escape sequence `\xHH`, where **HH** is a two digit hexadecimal code representing the actual ASCII code of the character.

This, for example, allows identifiers and command field data to contain spaces, which would otherwise be treated as field separators.

For example,	<code>#Record Deck#</code>
now becomes	<code>#Record\x20Deck#</code>
and	<code>!\$ARTIST name of artist\$</code>
becomes	<code>!\$ARTIST name\x20of\x20artist\$</code>

The following (ASCII) characters must be encoded, if they are to be included as part of an identifier or as part of a command.

- | | | |
|-------------|-------|------------------------------------|
| - 32 (0x20) | space | - field separator |
| - 35 (0x23) | # | - source identifier delimiter |
| - 36 (0x24) | \$ | - command delimiter |
| - 38 (0x36) | & | - group identifier delimiter |
| - 64 (0x40) | @ | - destination identifier delimiter |
| - 92 (0x5C) | \ | - escape sequence |
- Additionally, top-bit set (ASCII codes 128-255) characters can now also be included, using the same method.

Note:

¹ The UNIDISK supports the ISO 8859-1 character set (with some exceptions, see ²).

² Characters within the ranges 0 to 31, and 128 to 159 should not be used.

³ Character 127 (DELETE) will delete the last character received from the RS232 buffer.

⁴ The main use of escape sequences will be to output Album, Artist and Track names. It is therefore **highly recommended that hosts do not use escape sequences unless absolutely necessary, thereby limiting any possible problems when this product is connected to a daisy chain of products which includes previous incarnations of Linn equipment (software in these products will simply treat them as raw ASCII data).**

Appendice C : Communications Settings

The UNIDISK uses the following communications settings:

- 7 bits data
- 1 stop bit
- even parity
- baud rate specified by host (initially 9600)

Appendice D : IGNORED Disc Commands

While using the disc commands, there will be specific points at which the command does not make sense.

In these cases the response will be of the form ...

`$IGNORED command reason$`

where `IGNORED` is the ignored field
 `command` is the command being ignored
 `reason` is the reason the command was ignored.

For example, **`$SEARCH > 2X$`** when the tray is opened

Would respond, **`$IGNORED SEARCH TRAY_OPENED$`**

The following table details the *reason* for a command being ignored.

Reason	Details
UNIT_INSTANDBY	- Product in standby
UNIT_POWEREDUP	- Product powering up
UNIT_SETUPMENU	- Product in setup mode
TRAY_UNDEFINED	- Unknown tray state (product in standby or powering up)
TRAY_OPENING	- Tray in process of opening
TRAY_OPENED	- Tray opened
TRAY_CLOSING	- Tray in process of closing
TRAY_CLOSED	- Tray closed and in process of detecting disc
DISC_UNDEFINED	- Unknown disc state (product in standby, powering up or tray state unknown)
DISC_LOADING	- Determining disc type
DISC_NODISC	- No disc loaded or unknown disc type
DISC_UNKNOWN	- Unknown disc type
DISC_CDDA	- Disc type detected - not ready to process commands
DISC_SACD	- Disc type detected - not ready to process commands
DISC_VCD	- Disc type detected - not ready to process commands
DISC_SVCD	- Disc type detected - not ready to process commands
DISC_DVD	- Disc type detected - not ready to process commands
DISC_DVDA	- Disc type detected - not ready to process commands
DISC_DATA	- Disc type detected - not ready to process commands
PLAY_UNDEFINED	- Unknown play state (product in standby, powering up or tray/disc state unknown)
PLAY_PLAYING	- Playing - cannot process command in this mode
PLAY_PAUSED	- Paused - cannot process command in this mode
PLAY_PRESTOP	- Pre-Stopped - cannot process command in this mode
PLAY_STOPPED	- Stopped - cannot process command in this mode
PLAY_SEARCHING	- Searching - cannot process command in this mode
PLAY_SCANNING	- Scanning - cannot process command in this mode
PLAY_DVDMENU	- In a DVD menu - cannot process command in this mode

Relationship Between Disc Commands And Product State

The following table details the outcome of a command in relation to the current state of the product.

For example:

Command: **\$PLAY\$** when current state is *DISC_NODISC*

Response: **\$IGNORED PLAY DISC_NODISC\$**

✓ denotes command will be ignored (digit denotes that certain variants of command are allowed)

	OPEN	CLOSE	PLAY	PAUSE	STOP	MODE	TRACK	CHAPTER	DISCINFO	NAMEINFO	SEARCH	TIME	PROGRAM	REPEAT	SKIP	ZOOM	KEY	ANGLE	MENU	LAYER
UNIT_INSTANDBY	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
UNIT_POWEREDUP	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
UNIT_SETUPMENU	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
TRAY_UNDEFINED			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
TRAY_OPENING			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
TRAY_OPENED				✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
TRAY_CLOSING			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
TRAY_CLOSED			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_UNDEFINED			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_LOADING			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_NODISC			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_UNKNOWN			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_CDDA			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_SACD			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_VCD			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_SVCD			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_DVD			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_DVDA			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
DISC_DATA			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
PLAY_UNDEFINED			✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
PLAY_PLAYING													2							4
PLAY_PAUSED												1	2					✓		4
PLAY_PRESTOP				✓			✓	✓		✓	✓	1	2	3	✓	✓		✓		4
PLAY_STOPPED				✓			✓	✓			✓	1		3	✓	✓		✓		
PLAY_SEARCHING													2							4
PLAY_SCANNING													2							4
PLAY_DVDMENU			✓	✓			✓	✓		✓	✓	✓	✓	✓	✓	✓		✓		4

Note:

¹ All TIME commands apart from ?, DISC TOT and TRACK TOT commands will be ignored.

² Program RANDOM, SHUFFLE, INCLUDE and EXCLUDE commands will be ignored.

³ Repeat BEG and END commands will be ignored.

⁴ All LAYER commands apart from ? will be ignored.